


- High temperature low profile SOD
- Quick Thermal response, better in product safety
- Highly responsive in an abnormal condition, faster 2 to 5 times than a thermal fuse
- Long-term stability in high temp. compared to thermal fuse



Specifications

- Operating Temp
100~300°C ±5%
- Resetting Temp
Below -35°C 1cycle
- Contact ratings
125V /250V 5A resistive

Dimensions



Applications


- Hair straightner
- Iron
- Coffee maker
- Hot plate
- Electric footwarmer
- Fan heater

Safety Approval

※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings	Max Temp	File No.
TH910M	UL	UL873	Single Operation Device	125V/ 250V AC 5A 1cycle resistive	300°C	E50124
	c-UL	CSA C22.2 No.24	Single Operation Device	125V/ 250V AC 5A 1cycle resistive	300°C	E50124
	EN(VDE)	EN60730-2-9	Single Operation Device	250V AC 5A resistive (Below- 35°C 1cycle)	300°C	892100-4510-0041

Operating Temp. Drop due to Current

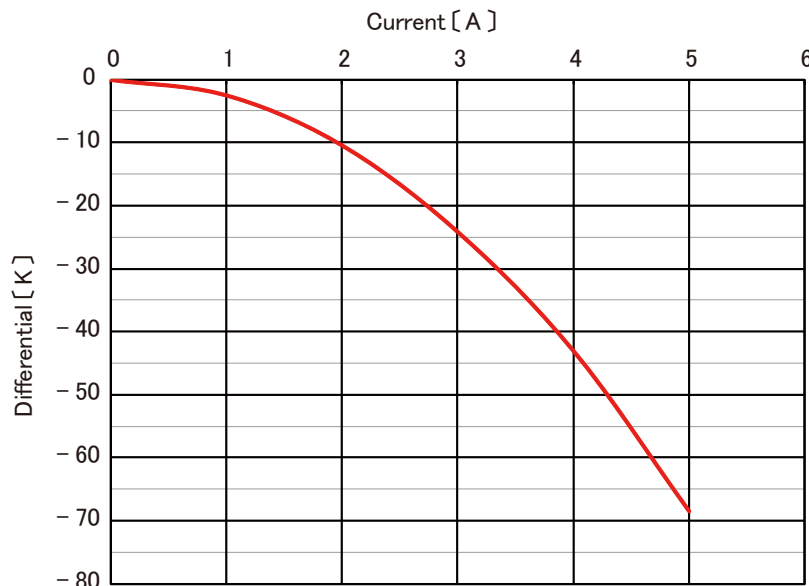

Variation

TH910

<input type="checkbox"/>	None
<input checked="" type="checkbox"/>	Metal Cover

EU RoHS Compliant

Further information, write or call;
UCHIYA THERMOSTAT CO.,LTD.
 2-176-1 TAKASU, MISATO-SHI,
 341-0037, JAPAN

E-mail: sales@uchiya.co.jp
 URL: http://www.uchiya.co.jp
 TEL: (+81)-48-955-4181
 FAX: (+81)-48-956-1310