


- World's only "DUAL SPRING MECHANISM"
- Stronger Contact Pressure, Higher Vibration/Impact Durability
- Bigger non-trip current receivable
12A(* $\Delta T=15K$)
* ΔT =Operating Temp. minus ambient temp.

BPF


thermal protector
battery protector

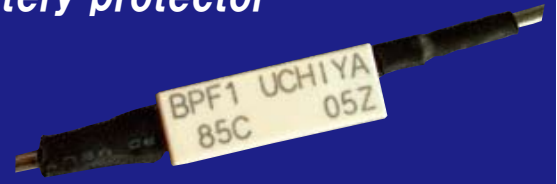

Specifications

- Operating Temp 60°C~100°C(5°C step)
- Tolerance $\pm 5^\circ\text{C}$ 、 $\pm 7^\circ\text{C}$ 、 $\pm 10^\circ\text{C}$
- Resetting Temp 46°C or higher
- Maximum non-trip current
21A(Operating Temp 80°C Ambient 25°C)
12A(Operating Temp 80°C, $\Delta T=15K$)
 ΔT = operating temp - ambient temp
- Maximum cut-out current 120A 12V DC

Dimensions

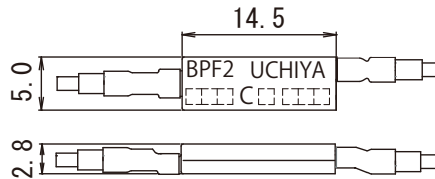

Applications


- Lithium-ion Battery Pack
- NiMH Battery Pack
- NiCd Battery Pack
- DC Small Motor

Safety Approval


※Contact us approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings	Max Temp	File No.
BPF	UL	UL 873	Regulating	15A/ 18V DC (resistive) 6000 cycles	100°C	E50124
	c-UL	CSA C22.2 No. 24	Appliance Control	15A/ 18V DC (resistive) 6000 cycles	100°C	E50124
	EN(VDE)	EN 60730-2-9	Thermal Cut-out	15A/ 18V DC (resistive) 6000 cycles	100°C	892100-45100-0034
	CQC	GB 14536.10	Thermostat (Non-fused bimetal type)	15A/ 18V DC (resistive)	100°C	CQC11002059931 CQC11002059933

Graph Left: Tripping Time vs Current (at 25°C)

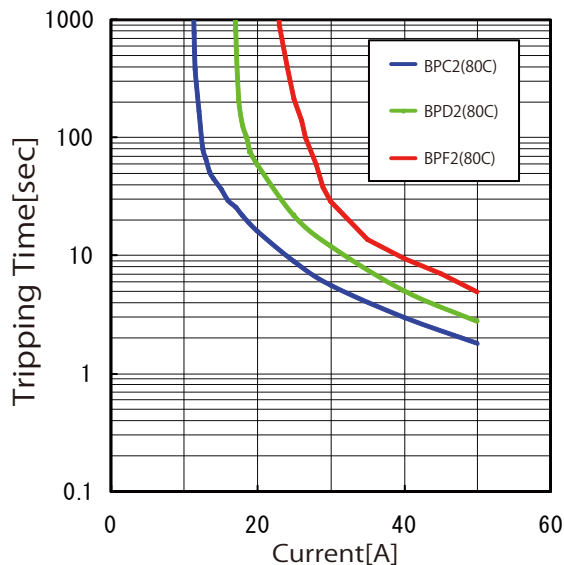

Graph Right: Operating Temp. Drop due to Current

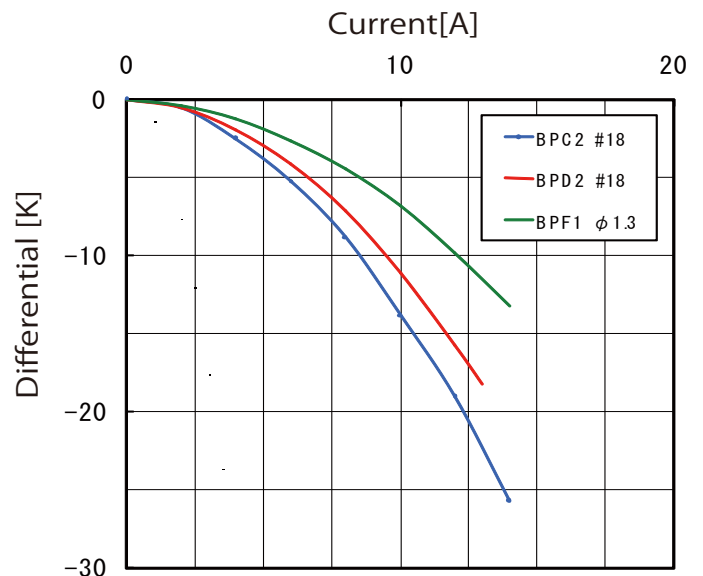

Variation

BPF

	Lead
	None
1	Uninsulated Solid
2	insulated wire
7	Clamp terminal



Further information, write or call;

UCHIYA THERMOSTAT CO.,LTD.
2-176-1 TAKASU, MISATO-SHI,
SAITAMA-KEN 341-0037, JAPAN

E-mail: sales@uchiya.co.jp
URL: <http://www.uchiya.co.jp>
TEL: (+81)-48-955-4181
FAX: (+81)-48-956-1310