


- Model UB7 with different terminals configuration
- Quick heat response
- Compact in place
- Worldwide Safety Approvals



**Specifications**

- Operating Temp: 70°C~150°C(5°C step)
- Tolerance: ±5°C、±7°C、±10°C
- Differential: 30±15K(standard)
- Breaking capacity:
  - 15A 125V AC 6000 cycles(resistive)
  - 13A 125V AC 10000 cycles(resistive)
  - 10A 250V AC 10000 cycles(resistive)

**Dimensions**



**Applications**

- Overheat Protector
- Small Hair Drier
- Fan Heater
- Hand Dryer



**Safety Approval**

※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings		Max Temp	File No.
<b>UB7</b>	UL	UL873	Regulating	15A /125V AC (resistive)	6000 cycles	180°C	E50124
	UL	UL873	Regulating	8A /250V AC (resistive)	6000 cycles	180°C	E50124
	UL	UL873	Regulating	16A /125V AC (resistive)	6000 cycles(UB7)	145°C	E50124
	UL	UL873	Regulating	8A /250V AC (resistive)	6000 cycles(UB7)	145°C	E50124
<b>UB76</b>	c-UL	CSA C22.2 No.24	Appliance Control	15A /125V AC (resistive)	6000 cycles	180°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	8A /250V AC (resistive)	6000 cycles	180°C	E50124
<b>UB77</b>	c-UL	CSA C22.2 No.24	Appliance Control	16A /125V AC (resistive)	6000 cycles(UB7)	145°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	8A /250V AC (resistive)	6000 cycles(UB7)	145°C	E50124
	EN (VDE)	EN IEC 60730-2-9	Thermal Cut-out	10A(5A)/250V AC resistive (inductive)	10000 cycles	180°C	40011309
	CMJ		Thermal Cut-out	13A /125V AC resistive	10000 cycles	150°C	J-28
	CQC	GB14536.10	Thermostat (Non-fused bimetal type)	10(5A) /250V AC		180°C	CQC02002001579 CQC10002050632

Graph Left : Tripping Time vs Current (at 25°C)

Graph Right : Operating Temp. Drop due to Current

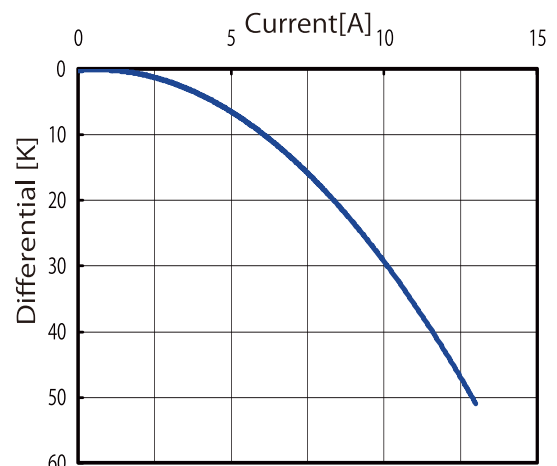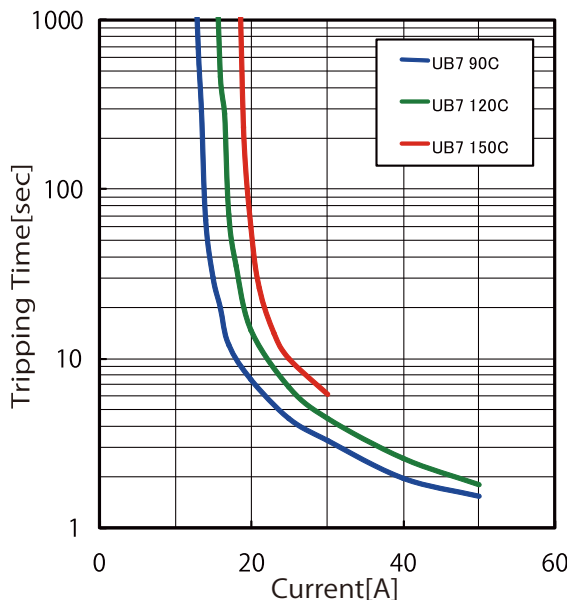

**Variation**

	Exterior
	Standard
1	Dust Cover
6	Terminals aside
7	Terminals aside and bent

**UB7**



Further information, write or call;  
**UCHIYA THERMOSTAT CO.,LTD.**  
 SALES HEADQUARTERS KANAMACHI OFFICE  
 SHIBUSAWA KANAMACHI BUILDING 3F, 1-23-2  
 HIGASHI KANAMACHI KATSUSHIKA-KU, TOKYO-TO 125-0041, JAPAN

E-mail: sales@uchiya.co.jp  
 URL: http://www.uchiya.co.jp  
 TEL: (+81)-3-5672-9830  
 FAX: (+81)-3-5672-9831