


- Model UB8P with dust proof cover (PBT)
- Phenol walls prevent spark
- **Larger Electrical Capacity**
125V/25A by UL recognition,
250V / 16(2)A by VDE approval
Suitable to use in heating appliance of 2kw and more.

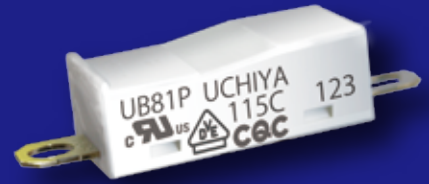


Specifications

- Operating Temp 60°C~140°C(5°C step)
- Tolerance ±5°C、±7°C、±10°C
- Reset not automatic reset
- Breaking capacity

25A 125V AC	6000 cycle (resistive)
13A 250V AC	6000 cycle (resistive)

Dimensions

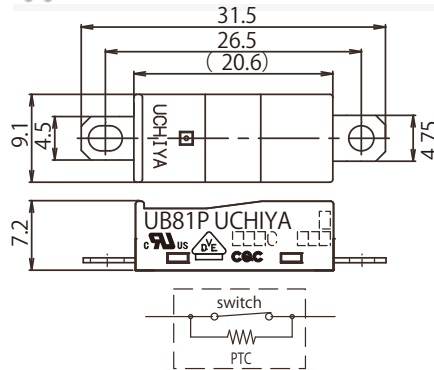

Applications



- Overheat protector
- Blender
- Food Processor
- Dish Washer
- Fan Heater

Safety Approval

※Contact us for approved conditions in detail.

Model	Agency	Standard	Category	Electrical Ratings		Max Temp	File No.
UB81P	UL	UL873	Regulating	25A /125V AC (resistive)	6000 cycles	140°C	E50124
	UL	UL873	Regulating	13A /250V AC (resistive)	6000 cycles	140°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	25A /125V AC (resistive)	6000 cycles	140°C	E50124
	c-UL	CSA C22.2 No.24	Appliance Control	13A /250V AC (resistive)	6000 cycles	140°C	E50124
	EN (VDE)	EN 60730-2-9	Voltage Maintained Temperature Limiter	16A(2A) /250V AC resistive (inductive)	6000 cycles	140°C	892100-4510-0039
	EN (VDE)	EN 60730-2-9	Voltage Maintained Thermal Cut-out	16A(2A) /250V AC resistive (inductive)	6000 cycles	125°C	892100-4510-0039
	CQC	GB14536.10	Thermostat (Non-fused bimetal type)	25A/125V, 13A/250V AC		140°C	CQC11002059930 CQC11002059934

Graph Left: Tripping Time vs Current (at 25°C) Graph Right: Operating Temp. Drop due to Current

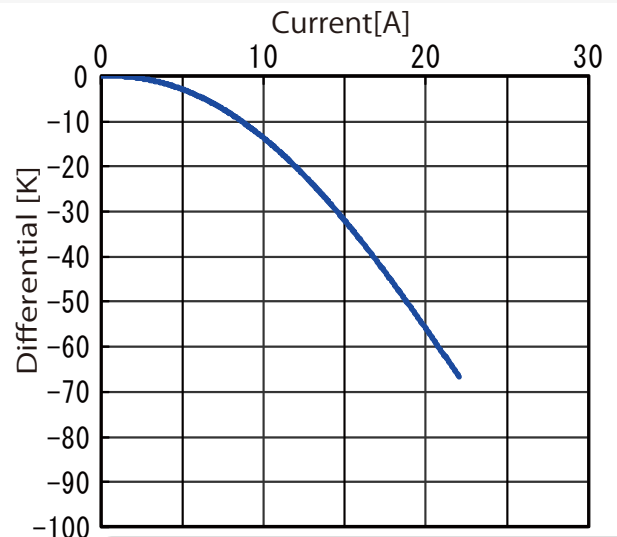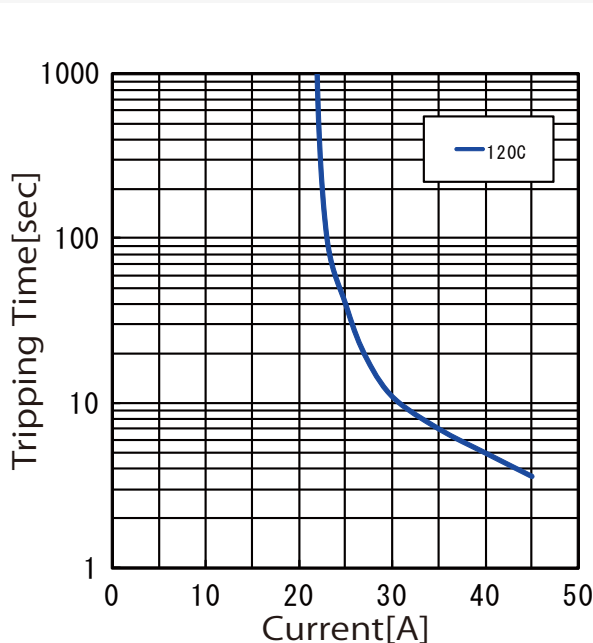

Variation

Dust Cover	<input type="checkbox"/>	No
	<input checked="" type="checkbox"/>	Yes

Reset	<input type="checkbox"/>	Automatic
	<input checked="" type="checkbox"/>	Off Self-Hold

UB8

EU RoHS Compliant

Further information, write or call;
UCHIYA THERMOSTAT CO.,LTD.
 2-176-1 TAKASU, MISATO-SHI,
 SAITAMA-KEN 341-0037, JAPAN

E-mail: sales@uchiya.co.jp
 URL: http://www.uchiya.co.jp
 TEL: (+81)-48-955-4181
 FAX: (+81)-48-956-1310

ウチヤ・サモスタット 株式会社
 UCHIYA THERMOSTAT CO.,LTD.